DRI750

DDR3-1066, PC3-8500, Registered, ECC, 1.5V, 240-pin DIMMs

Products in Family

DRI750/8GB (2 x 4GB 2Rx8 DIMMs)
DRI740/16GB (2 x 8GB 2Rx4 DIMMs)
DRI750/16GB (2 x 8GB 4Rx8 DIMMs)
DRI750/32GB (2 x 16GB 4Rx4 DIMMs)

Features

240-pin JEDEC-compliant DIMMs
133.35 mm wide by 30 mm high (1.181" x 5.25")
Data Transfer Rate: 10.6 Gigabytes/sec
Operating Voltage: 1.5 V ±0.075
Fully RoHS Compliant
Thermal Sensor

Description

Each DRI750 and DRI740 upgrade consists of a single DDR3-1066 Registered ECC DIMM that conforms to JEDEC's DDR3, PC3-8500 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	IBM Product	Supported in these IBM systems:
DRI750/8GB	4526	Power 710 and 730 (8231-E2B), Power 720 (8202-E4B), Power 740 (8205-E6B), Power 750 (8233-E8B), Power 755 (8236-E8C)
DRI740/16GB	4529	
DRI750/16GB	4527	
DRI750/32GB	4528	

Note: Not all products supported in all systems. See IBM or Dataram websites for specific memory options for your model.

Front view

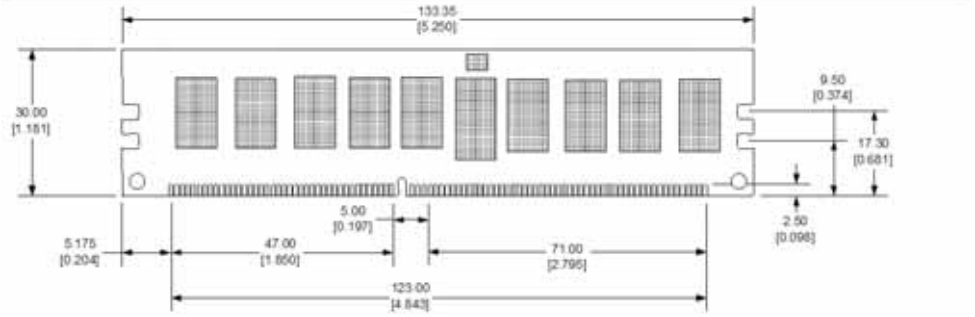

Back view

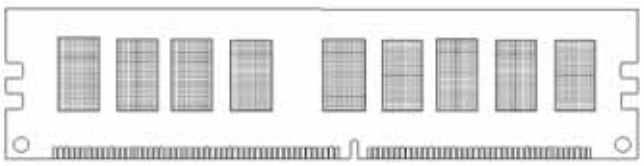

Side view



Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Copyright © 2010 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.